

MOONWALK SERVICE



DOCUMENTAZIONE

Moonwalk Service

c/o Claudio Giulio Prencipe

Noleggio Audio e Luci | Installazioni per Eventi
via Camogli 11/3 - Rivoli frazione Cascine Vica, 10098 (TO)


+39/3477822465

moonwalkservice@gmail.com

www.noleggio-audio-luci.it | www.moonwalkgroup.com

NB: tutti i diritti appartengono ai rispettivi proprietari;
la presente documentazione viene resa disponibile presso il sito
www.noleggio-audio-luci.it e www.moonwalkgroup.com per
scopi puramente informativi. Vi invitiamo a visitare i siti
dei produttori per consultare le ultime edizioni disponibili.

ULTRAGAIN PRO-8 DIGITAL ADA8000

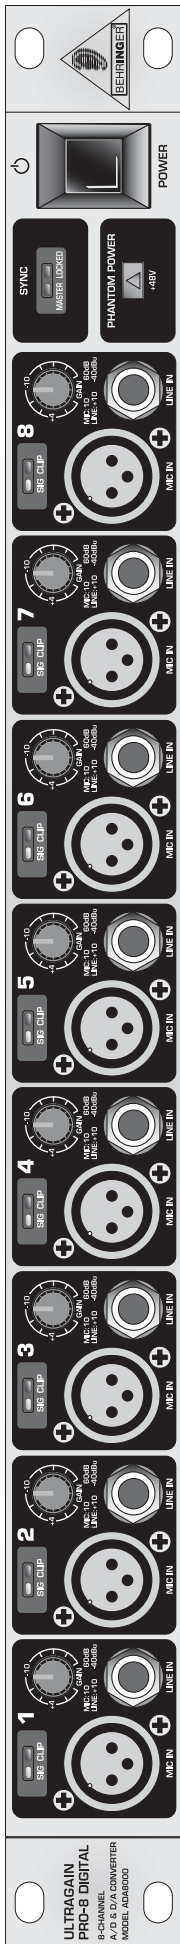

Technical Specifications

Version 1.1 October 2003

ENGLISH

www.behringer.com



ULTRAGAIN PRO-8 DIGITAL ADA8000

ULTRAGAIN PRO-8 DIGITAL ADA8000

High-End 8-Channel A/D & D/A Converter with Premium Mic Preamplifiers and ADAT® Interface



- ▲ Ultra high-quality 8-channel A/D & D/A converter for virtually any digital recording/mixing environment
- ▲ 8 new state-of-the-art, studio-grade IMP “Invisible” Mic Preamps
- ▲ Phantom power on all microphone inputs
- ▲ The perfect expansion for BEHRINGER’s digital mixing console DDX3216
- ▲ High-end 24-bit A/D and D/A converters for ultimate signal purity
- ▲ Processes 44.1 and 48 kHz sample rates
- ▲ External sample rate synchronization via wordclock or ADAT® input
- ▲ Optical ADAT® IN/OUT interface for ultimate compatibility
- ▲ ADAT® input can be routed to all line outputs
- ▲ All mic/line inputs are routed to the ADAT® output
- ▲ Master/locked (slave) LED display easily visible on the front panel
- ▲ Extremely rugged construction ensures long life even under the most demanding conditions
- ▲ Designed in Germany. Manufactured under ISO9000 certified management system

ADA8000

ULTRAGAIN PRO-8 DIGITAL ADA8000

SPECIFICATIONS

MICROPHONE INPUTS

Type	Electronically balanced, discrete input circuitry
Gain range	+10 to +60 dB
Max. input level	+6 dBu @ +10 dB gain for 0 dBFS
Impedance	approx. 2 k Ω balanced
Phantom power	+48 V, switchable

LINE INPUTS

Type	1/4" TRS connector, electronically balanced, discrete input circuitry
Impedance	approx. 20 k Ω balanced, approx. 10 k Ω unbalanced
Gain range	-10 to +40 dB
Max. input level	+26 dBu @ -10 dB gain for 0 dBFS

LINE OUTPUTS

Type	XLR, electronically balanced
Impedance	approx. 500 Ω balanced, approx. 250 Ω unbalanced
Max. output level	+16 dBu @ 0 dBFS

DIGITAL INPUT

Type	TOSLINK, optical connector
Format	ADAT [®] , 8 channels, 24-bit @ 44.1/48 kHz

DIGITAL OUTPUT

Type	TOSLINK, optical connector
Format	ADAT [®] , 8 channels, 24-bit @ 44.1/48 kHz

A/D CONVERTER

Type	24-bit, 64-times oversampling, delta-sigma
Dynamic range	Analog input to digital output, approx. 103 dB

D/A CONVERTER

Type	24-bit, 128-times oversampling, delta-sigma
Dynamic range	Digital input to analog output, approx. 100 dB

SYNCHRONIZATION

Source	Internal 44.1 kHz, internal 48 kHz, ADAT [®] input, wordclock input
--------	--

WORDCLOCK INPUT

Type	BNC, 1 x sample rate
Input level	2 to 6 V peak-to-peak
Frequency range	44.1 to 48 kHz

SYSTEM SPECIFICATIONS

Frequency range	10 Hz to 21 kHz @ 48 kHz sample rate
THD	<0,01%
Crosstalk	<-86 dB

POWER SUPPLY

Mains voltage	
USA/Canada	120 V~, 60 Hz
Europe/U.K./Australia	230 V~, 50 Hz
Japan	100 V~, 50 - 60 Hz
General export model	120/230 V~, 50 - 60 Hz
Power consumption	25 W
Fuse	100 - 120 V ~: T 630 mA H 200 - 240 V ~: T 315 mA H
Mains connection	Standard IEC receptacle

PHYSICAL/WEIGHT

Dimensions (H x W x D)	approx. 1 3/4" (44.5 mm) x 19" (482.6 mm) x 8 1/2" (217 mm)
Weight	approx. 2.3 kg
Shipping weight	approx. 3.3 kg

BEHRINGER constantly strives to maintain the highest quality standards. Modifications may be made, if necessary, without prior notice. The specifications and appearance of the equipment may therefore differ from those listed or illustrated.

ULTRAGAIN PRO-8 DIGITAL ADA8000

The information contained in this publication is subject to change without notice. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER is a registered trademark. ALL RIGHTS RESERVED.

ADAT is a registered trademark of the Alesis Corporation and is in no way associated or affiliated with BEHRINGER.

© 2003 BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Müncheide II, Germany
Tel. +49 2154 9206 0, Fax +49 2154 9206 4903
